


LOCK
BLOX



A WORD OF
POSSIBILITIES

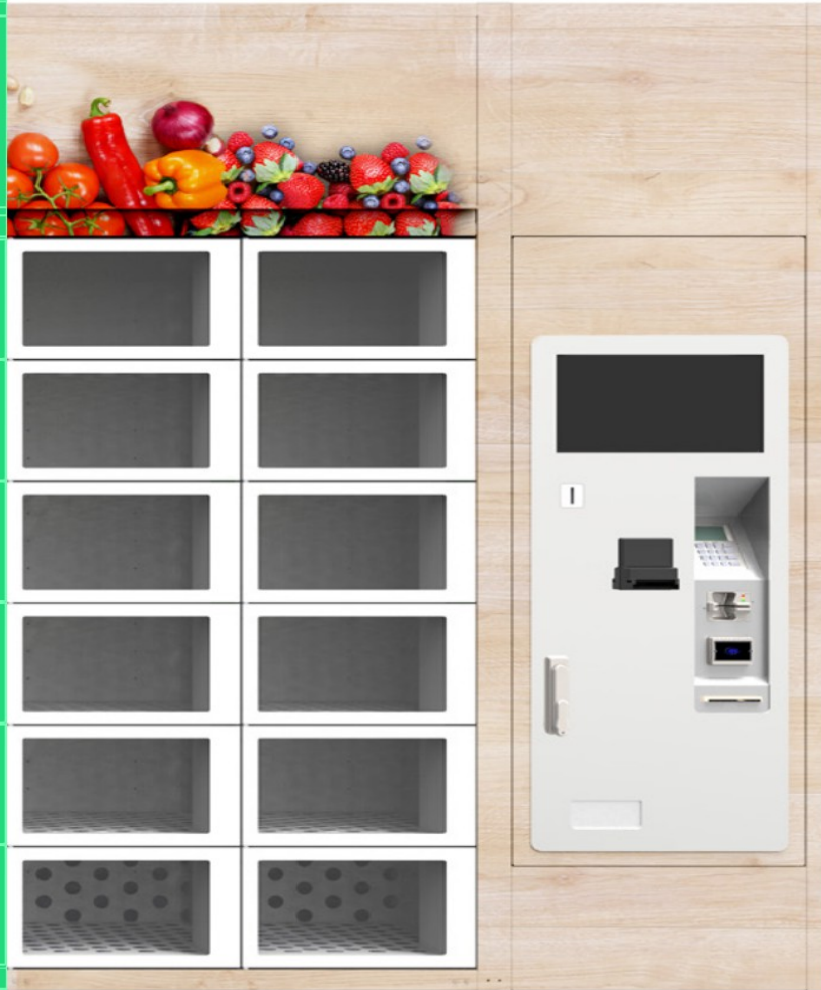

BUILD YOUR OWN LOCKBLOX

LockBlox is a modular system, which you can use to put together your own vending machine. The Lockblox has a cooled (Breeze) and uncooled (Smart) version, which can also be delivered in a combined version. You can choose from a wide variety of different box/door sizes this makes sure that there is a right door for every product. The door can be delivered with a window or closed. The modules can be connected to each other and then they can be connected to a central payment module. This allows you to create your own Lockbox machine.

THINK BIG, START SMALL

The modular setup gives you the possibility to start with a small Lockblox, which you can expand later by simply connecting new modules. This makes you able to keep your starting investment low and to increase it when necessary.



LOCK
BLOX



AS MANY AS 11
DIFFERENT BOX SIZES




DIVERSE PAYMENT
METHODS



SMART

Smart is the uncooled version of the LockBlox, which is ideal for the sale of i.e. tuber vegetables, cabbage, eggs or other food and non-food related products. The foundation of the Smart is the W12-module which rests on four legs, which makes it easy to place next to each other or in a corner setup. The W12-module is suited for every type of door (see the page to the right). The payment unit for the Lockblox is always incorporated in the W12-module and can be placed either in the right or the left of the module

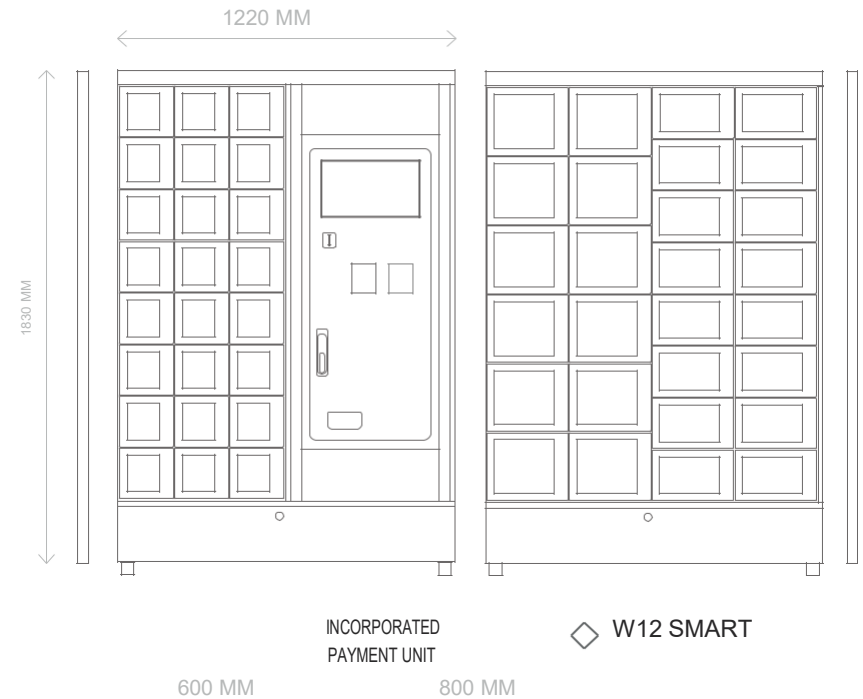


BREEZE

The cooled Lockblox Breeze is eminently suitable for the issue of perishable feed, flowers or medicine. The Breeze comes in two module sizes, the W6 and the W8. In the door scheme that is shown you can look up which doors are suitable for which type of module. The payment module can always be found on the righthand side, because this also offers space for the cooling unit.

COOLING UNIT

There's a choice of two types of cooling units, depending on the number of modules that you want to be cooled.

- »» Cooling unit L: max. length modules total 240 cm (= 4 modules W6 of 3 modules W8)
- »» Cooling unit XL: max length modules total 420 cm (= 7 modules W6 of 5 modules W8)

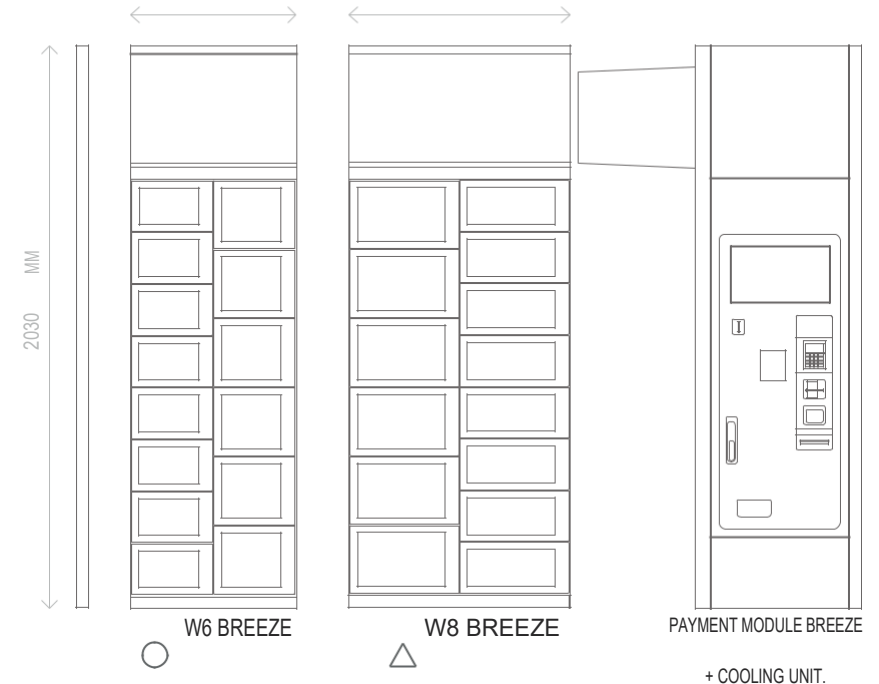



142,5 x 136 mm
 32x in module W8



142,5 x 236 mm
 16x in module W6



142,5 x 336 mm
 16x in module W8



H8
 W3

455 x 236 mm
 6x in module W6




H8
 W4

455 x 336 mm
 6x in module W8



H4
 W3

205 x 236 mm
 12x in module W6



H4
 W4

205 x 336 mm
 12x in module W8



H12
 W3

705 x 236 mm
 8x in module W12*





H12
 W4

705 x 336 mm
 6x in module W12*




H6
 W4

330 x 336 mm
 8x in module W8

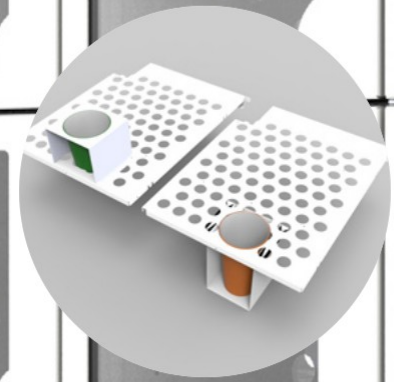

GENERAL DIMENSIONS

Width (in mm)	Smart	Breeze
Payment module	600 (built-in)	600 (right)
Module W6	-	600
Module W8	-	800
Module W12	1220	-
Closing piece	60 (2x)	60 (1x left side)
Box depth (in mm)	500	390
Height x width (in mm)	1830 x 550	2030 x 550

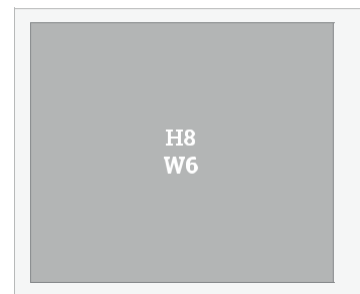

H8
 W6

455 x 536 mm
 3x in module W6



*Boxes H12W3 en H12W4 only available for LockBlox Smart modules

...ally available for long...
 ...are two types of vase...
 ...the boxes with width W3 and...
 ...first type of holder (with...
 ...vase) is suitable for all...
 ...for the box at the bottom



BOX LIGHTING

For a perfect showcase of your products, you can choose for LED-lightening per box. The lighting for the box will be enabled when you place a product in the box. When a product is taken out, the lighting in the box will automatically switch off, so the client's attention is only directed towards the full box. When the box is refilled, the lighting will of course be switched on again.



COULD YOU SHOW US YOUR PRODUCTS?

DOOR WITH PLEXIGLASS

The Lockblox Smart doors are made with 8 mm plexiglass as a standard. In the Breeze version, however, the plexiglass windows are mounted in a frame of rigid foam and the doors contain a rubber sealing.

CLOSED DOOR

If there is no need for any visibility of the products in the LockBlox, you can choose for closed doors. Once chosen for this option, the plexiglass will not be included, but the Breeze doors shall be isolated and provided with a rubber sealing.

GIVE IT YOUR OWN LOOK & FEEL

Decorate your LockBlox vending machine with your own stickers to make it stand out even more.



A UNIQUE TOUCH

LockBlox is equipped with a 7-inch touchscreen display

with a user-friendly Graphic User Interface (GUI). The GUI is intended to make the sale as quick and simple as possible. After the Client has entered their box number, the price and a picture of the chose product will appear and the product will automatically be added to their shopping card. Then the client can add another product or to checkout immediately by putting cash in the machine or by starting a PIN-transaction. After the payment, the machine shall indicate which box will be opened.


15.6 INCH TOUCHSCREEN

Besides the 7-inch screen, you could also option for a 15-inch touchscreen display. With this bigger display, you can choose from two different GUI's, the Select-15 and the FIFO-15. The Select-15 has the same possibility as the 7" to choose the box number and put it in the shopping cart. However, the Select-15 gives your client a better touch-experience, clearer images, use of your own logo on every screen and a more extensive stock-menu


FIFO-15

With the FIFO-15 products cannot be chosen based on box number, but the client can select a product on the screen. The screen can display 12 products at the same time, but the scroll-function gives you the opportunity to add more products to your screen. Based on the First-In-First-Out principle the machine will decide which box shall open. This way the first product that was filled van always be the first to be issued and you can always guaranty your client's fresh products.


This option is only available in combination with a 15.6" display.

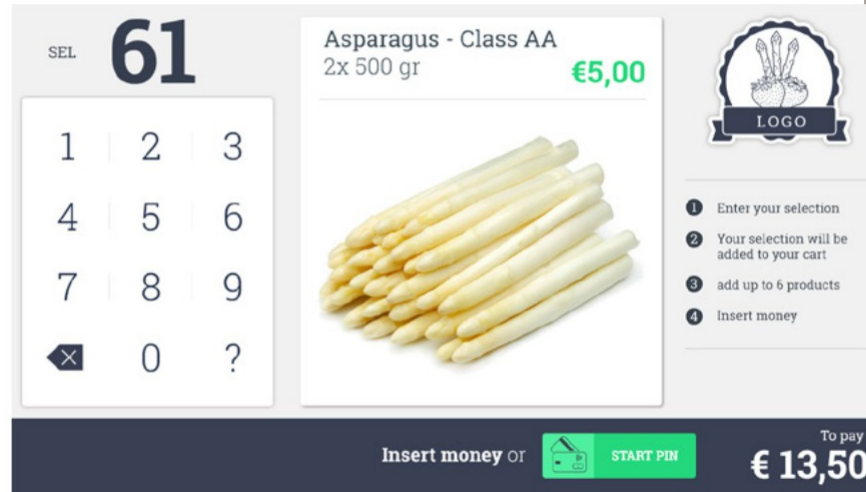

SELECT-15 GUI

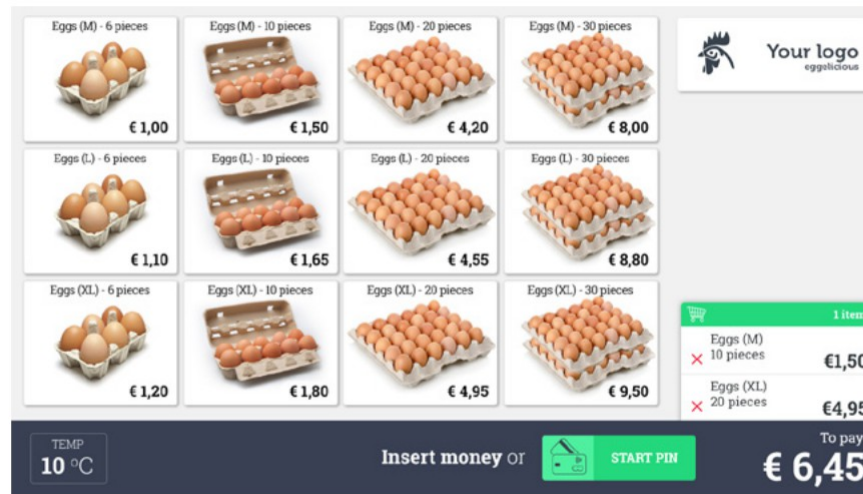

FIFO-15 GUI

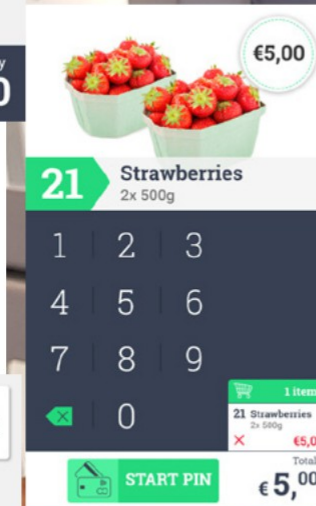

SELECT-7 GUI

REFILL MENU

Fill easily by only opening the empty boxes, or all, or per unit. Everything is designed to make your life easier.

OPTIONS

VOLUME DISCOUNT

Do you want to be able to give your clients discount when they buy several products? You can, with this additional function. You can fill in the minimum number of products that you desire with the appropriate percentage reduction. As soon as, your client fills their shopping cart with these product, the discount will show up directly and nicely settled.

CLICK & COLLECT

The 15.6-inch touchscreen offers you the possibility to collect orders. The client will get a special code and with this code they can collect their order from the locker. The order will be placed in a box that is selected by you and will not be available for the unrestricted sales. Your client can pay in your web shop while making the order or they can pay when collecting the order with the LockBlox.

This option is only available in combination with a 15.6" display.

REFILL BUTTON

You can open the stock-menu with a special code on the display. If you, however, prefer to be able to do this with a button that is only available with a key, there is also an option to get the refill button with a magnet.

ANTI-CONDENSATION AIR CURTAIN

When there is a vast temperature difference between the temperature outside and that in the LockBlox, there is a chance that there will occur some condensation on the locker doors. For the Breeze, we have developed an air curtain that blows away the condensation. This is available for both the 60 and the 80cm modules.

FUTURE PROOF

Because of the use of an intelligent mini-board PC the machine is future proof. Developments are going fast and therefore we can use it to keep on developing new functions or payment functions, that could also become an available option for you. This way you will always be up to date with your Lockbox.



SHOPPING CART

The shopping cart-function offers your client the possibility to do multiple purchases in only one transaction. Your client will be assisted quicker and your machine will sooner be available for your next client.



REFILL MENU 15.6 INCH



HOW WOULD YOU LIKE TO PAY?

LockBlox supports several payment systems that can also be combined.



CASH

With a cash-payment you can choose from a coin exchange system combined with a banknote reader. The coin exchange system except all types of euro coins (ex. €0,01 and €0,02) and gives change in return. The banknote reader is an expansion on the coin system and accepts denominations from €5, - until €50, -.



CONTACTLESS PAYMENT

With contactless payment you offer your client the possibility to pay sums up to €25, - in a quick and user-friendly way. You can choose from two different NFC-payment systems, Payter and Nayax.



PIN, CREDITCARD & CONTACTLESS PAYMENT

With this payment possibility you can offer the most possibilities to you clients and it is the safest way of payment. All transactions will immediately be credited to your bank account, so you don't have to deposit your money anymore.



INTERNAL PAYMENT SYSTEMS

Besides aforesaid payment systems we can also include (internal) payment systems based on QR-codes or RFID-tags in your Lockblox, on request. Ask for our possibilities and terms.






VENDING WEB

The online platform VendingWeb offers you the possibility to manage your LockBlox from a distance by using your PC, tablet or smartphone. On every moment of the day of course. By using VendingWeb you could i.e.:

- »» See your sells and profits per day, week, month or every desired period.
- »» Add or adjust product (prices, images and product names/descriptions)
- »» Recent stock in the LockBlox
- »» Supply advices
- »» Manage Click & Collect order
- »» See transaction data
- »» Events and malfunctions

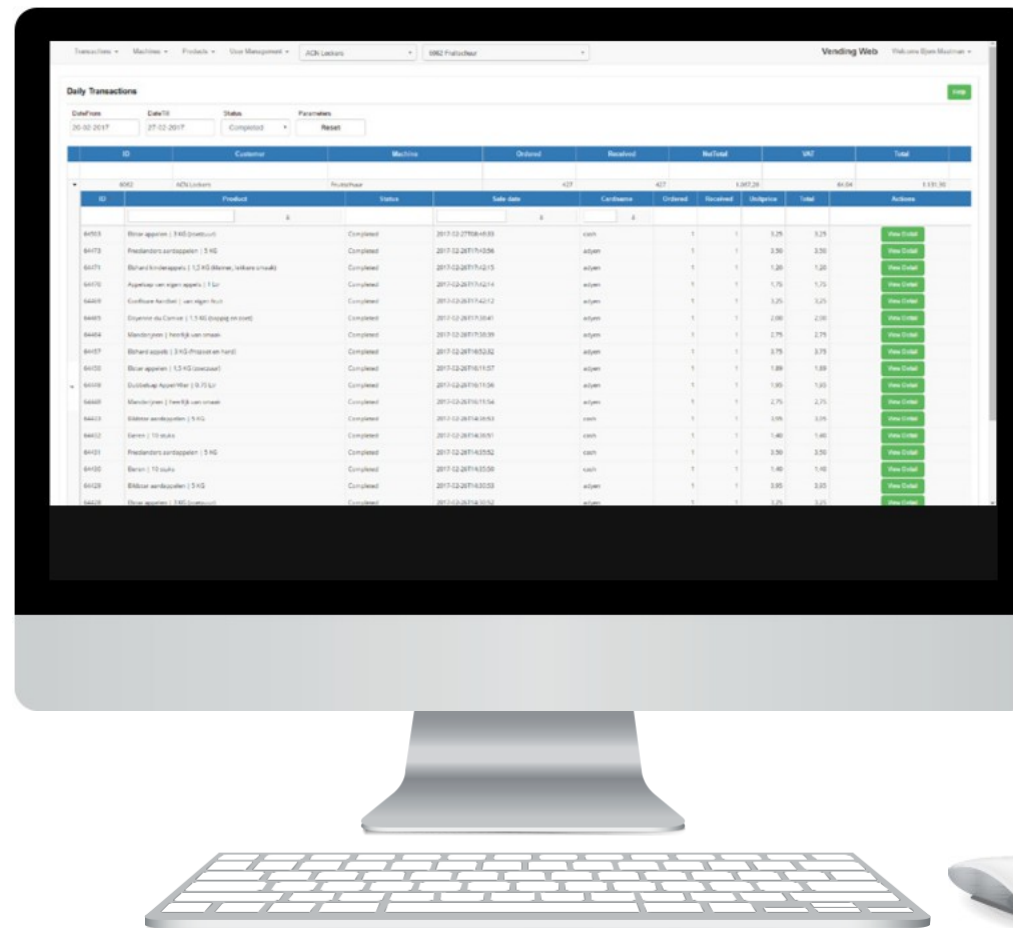





TECHNICAL SPECIFICATIONS

	Smart	Breeze
Voltage (V/Hz)	230V/50Hz	230V/50Hz
Power (Pmax)	150 W	1100 W
with LED lighting (Pmax)	280 W	1380 W
Max. # modules	10 modules	5 modules
Max. # boxes	512 boxes	160 boxes
Installation height	On hardened surface	On a platform of min. 20 cm

NEW

CONNECTION WITH SLAVE SPIRAL VENDING MACHINE

Add a spiral machine to your LockBlox and offer a huge variety of products to your customer. No need to buy additional payment systems and touch screens, just use the ones that are already in the LockBlox. That is a great cost saving for you and still you are able to expand your offerings. Optional you can choose for a cooling unit, lift system and/or electronic price rails. These electronic prices change automatically when you change the product price in vending web and activate it on the LockBlox.

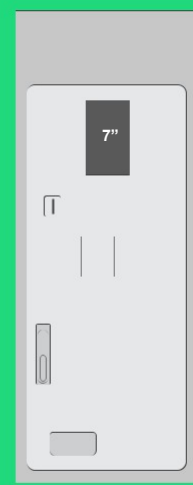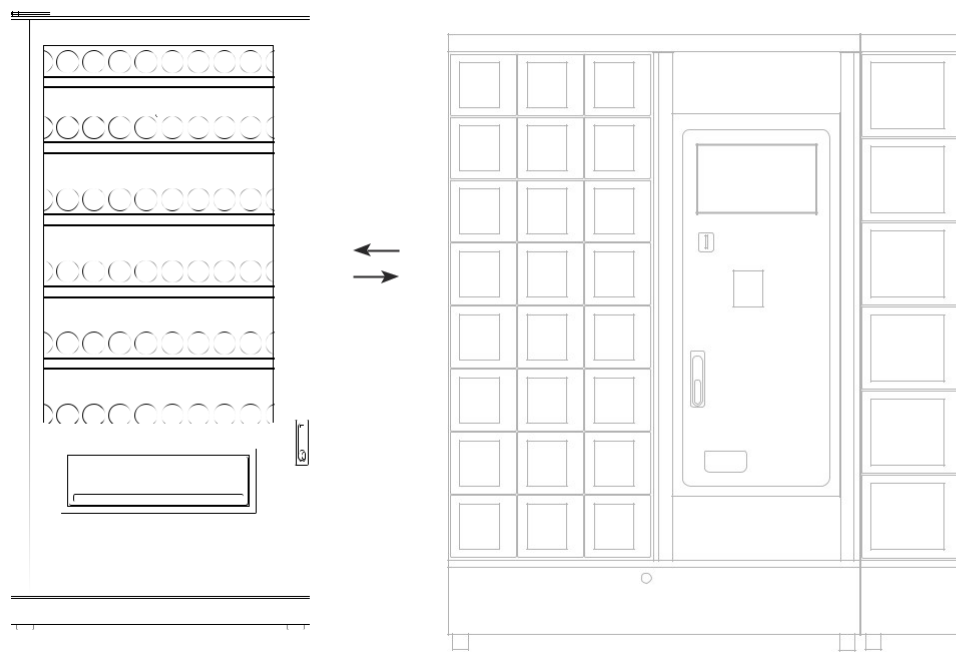


LAYOUT BASIC

7-INCH TOUCHSCREEN, COIN SYSTEM AND PREPARATIONS FOR BANKNOTE READER AND CONTACTLESS PAYMENT UNIT






LAYOUT PRO

15.6-INCH TOUCHSCREEN, COIN TAKING, BANKNOTE READER AND PIN SYSTEM (INCL. CONTACTLESS PAYMENT)

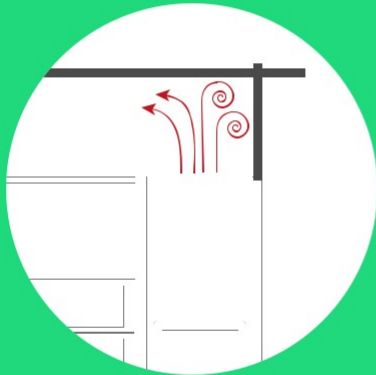


PREVENT TURBULENCE, TAKE CARE OF CONDUCTION OF THE WARM AIRFLOW

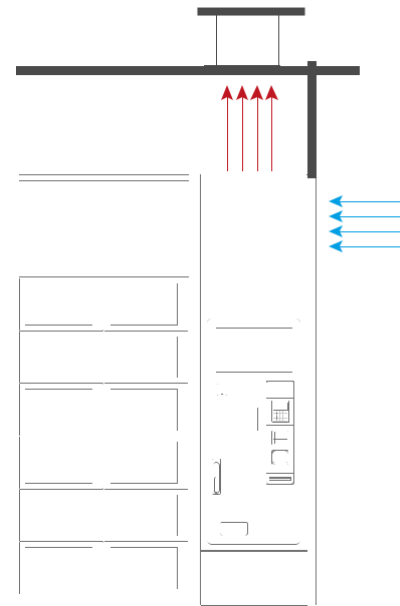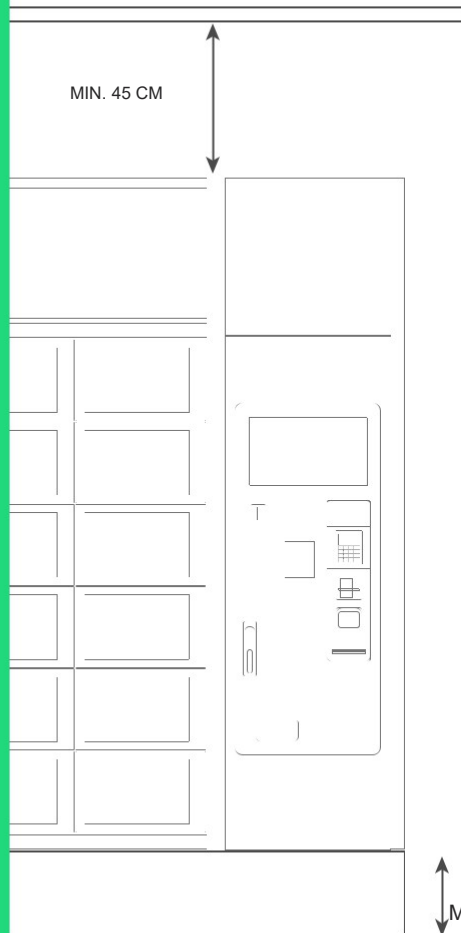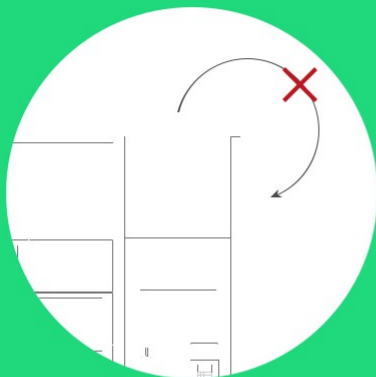

OPTIMISE INPUT AND OUTPUT OF AIR

Make sure that the cooling can get fresh air from the air outside. The output of warm air on the top is preferred to go directly to drainage outside as soon as possible.

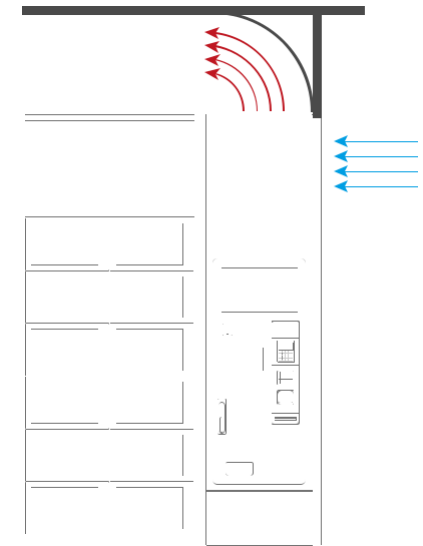

CONDUCTION OF WARM AIRFLOW

When the warm air cannot be disposed on the top, the warm airflow should be guided over to the left side of the machine or the backside if this is possible

** i.c.m. with LockBlox Smart a height of 21 cm is advisable*

INSTALLATION TERMS - LOCKBLOX SMART & BREEZE

- »» Place the machine on a flat surface
- »» There should be a stable internet connection available. The solving of malfunctions caused by a bad internet connection are not covered by the warranty. The Lockblox should be fully protected against influences of the weather after it is placed.

INSTALLATION TERMS - LOCKBLOX BREEZE

- »» Place the machine on a platform with a maximal height of 30 cm.
- »» Make sure that the machine gets fresh air from the air outside the building or canopy.
- »» On the top needs to be enough space (min. 45 cm) to guarantee the output of warm air.
- »» If the warm air is not able to leave the building or canopy, make sure that there is a good conduction of airflow. (Use a curved plate or discharge channel from min. 30 cm cross section, for example).
- »» The performance and duration of the cooler is for a large part determined by optimal in- and output of air. Prevent air turbulence and recirculation of warm disposed air.
- »» The emitted temperature and cooler specifications are measured in a stable ambient temperature of 18 degrees. Direct influences of weather and changed ambient temperature can influence the attainable temperature for the cooler. Therefore, rights cannot be exercised to the aforementioned specifications.





Managing Director
 enrico.palazzoni@tcssrl.com
 Mobile +39 335 56 18 977